

Reversible Motor 60W(□90mm)

60W Reversible Motor 60W(□90mm)

Motor Specification

Model		Output W	Voltage V	Frequency Hz	Poles	Duty	Starting Torque		Rated Load				Capacitor μF / VAC
Lead Wire Type	Terminal Box Type						kgfcm	N.m	Speed r/min	Current A	Torque kgfcm N.m		
9RDG*-60F□(-T): Gear Type Shaft 9RDD*-60F(-T): D-Cut Type Shaft 9RDK*-60F(-T): Key Type Shaft													
9RDGA-60F□	9RDGA-60F□-T	60	1∅110	60	4	30min.	5.20	0.520	1600	1.60	5.00	0.500	20.0 / 250
9RDGD-60F□	9RDGD-60F□-T	60	1∅220	60	4	30min.	5.00	0.500	1600	0.75	4.60	0.460	5.0 / 450
9RDGE-60F□	9RDGE-60F□-T	60	1∅220	50	4	30min.	5.40	0.540	1300	0.59	5.00	0.500	5.0 / 450
			1∅240				6.60	0.660		0.64	5.60	0.560	

1) Enter the phase & voltage code in the place * and enter the model type of attaching Gearbox in the box (□) within the motor model name.

2) All models contain a built-in thermal protector.

3) Gear Type Shaft is for attaching Gearbox and D-Cut & Key Type Shafts are for using motor only.

Max. Permissible Torque at Output Shaft of Gearbox

60Hz

Motor Model	Gearbox Model	Gear Ratio r/min	2	3	3.6	5	6	7.5	9	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
			900	600	500	360	300	240	200	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	9
9RDG□ -60FP	9PBK□BH 9PFK□BH	kgfcm	7.6	11.5	13.7	19.1	22.9	28.6	34.4	43.1	51.8	62.1	62.6	78.2	93.8	112.6	125.1	156.4	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0
		N.m	0.75	1.12	1.35	1.87	2.24	2.81	3.37	4.23	5.07	6.09	6.13	7.66	9.20	11.04	12.26	15.33	19.60	19.60	19.60	19.60	19.60	19.60	19.60	19.60
9RDG□ -60FH	9HBK□BH 9HFK□BH	kgfcm	-	11.5	13.7	-	22.9	-	34.4	43.1	51.8	62.1	62.6	88.2	93.8	112.6	-	156.4	187.7	210.5	252.5	300.0	300.0	300.0	300.0	
		N.m	-	1.12	1.35	-	2.24	-	3.37	4.23	5.07	6.09	6.13	7.66	9.20	11.04	-	15.33	18.39	20.62	24.75	29.40	29.40	29.40	29.40	

Motor Model	Gearbox Model	Gear Ratio r/min	10	12	15	18	25	30	36	50	60	Motor Model	Gearbox Model	Gear Ratio r/min	7.5	10	15	20	25	30	40	50	60	80
			180	150	120	100	72	60	50	36	30				240	180	120	90	72	60	45	36	30	22
9RDG□ -60FW	9WD□BL/ □BR/□BRL	kgfcm	37.7	44.2	53.1	61.3	80.5	91.1	106.0	142.9	122.4	9RDG□ -60FWH	9WHD□ -030	kgfcm	29.0	37.3	52.4	66.2	75.9	88.3	108.6	124.2	138.0	132.7
		N.m	3.70	4.33	5.21	6.00	7.89	8.93	10.39	14.00	12.00			N.m	2.84	3.65	5.14	6.49	7.44	8.66	10.64	12.17	13.52	13.00

50Hz

Motor Model	Gearbox Model	Gear Ratio r/min	2	3	3.6	5	6	7.5	9	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
			750	500	417	300	250	200	167	120	100	83	75	60	50	42	38	30	25	20	17	15	13	10	8	7.5
9RDG□ -60FP	9PBK□BH 9PFK□BH	kgfcm	9.3	13.9	16.7	23.2	27.9	34.9	41.8	52.5	63.0	75.6	76.2	95.2	114.2	137.1	152.3	190.4	200.0	200.0	200.0	200.0	200.0	200.0	200.0	
		N.m	0.91	1.37	1.64	2.28	2.73	3.42	4.10	5.15	6.17	7.41	7.46	9.33	11.20	13.43	14.93	18.66	19.60	19.60	19.60	19.60	19.60	19.60	19.60	
9RDG□ -60FH	9HBK□BH 9HFK□BH	kgfcm	-	13.9	16.7	-	27.9	-	41.8	52.5	63.0	75.6	76.2	95.2	114.2	137.1	-	190.4	228.5	256.2	300.0	300.0	300.0	300.0		
		N.m	-	1.37	1.64	-	2.73	-	4.10	5.15	6.17	7.41	7.46	9.33	11.20	13.43	-	18.66	22.39	25.11	29.40	29.40	29.40	29.40		

Motor Model	Gearbox Model	Gear Ratio r/min	10	12	15	18	25	30	36	50	60	Motor Model	Gearbox Model	Gear Ratio r/min	7.5	10	15	20	25	30	40	50	60	80
			150	125	100	83	60	50	42	30	25				200	150	100	75	60	50	38	30	25	18
9RDG□ -60FW	9WD□BL/ □BR/□BRL	kgfcm	45.9	53.8	64.7	74.6	98.0	110.9	129.0	142.9	122.4	9RDG□ -60FWH	9WHD□ -030	kgfcm	35.3	45.4	63.8	80.6	92.4	107.5	132.2	151.2	163.3	132.7
		N.m	4.50	5.27	6.34	7.31	9.60	10.87	12.64	14.00	12.00			N.m	3.46	4.45	6.26	7.90	9.06	10.54	12.95	14.82	16.00	13.00


1) Enter the phase & voltage code in the box (□) within the motor model name.

2) Enter the gear ratio in the box (□) within the Gearbox model name.


3) A colored background indicates gear shaft rotation in the same direction as the motor shaft; a white background indicates rotation in the opposite direction.

4) The rotating speed is calculated by dividing the motor's synchronous speed (50Hz: 1,500r/min, 60Hz: 1,800r/min) by the gear ratio. The actual speed is 2~20% less than the displayed value, depending on the size of the load.

● MOTOR MODEL:
9RDG□-90FWH (GENERAL FAN)





● FLANGE

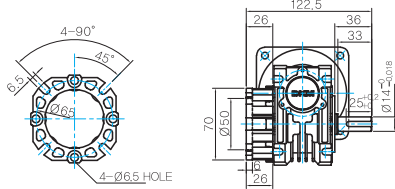


* The output flange and shafts are sold separately.

● GEARBOX MODEL:
9WHD□-030




● SHAFT (Unidirectional, Bi-directional)



● WEIGHT

PART	WEIGHT(Kg)
MOTOR	3.0
9PB(F)K2BH ~ 9PB(F)K18BH	1.3
9PB(F)K20BH ~ 9PB(F)K200BH	1.4
9HB(F)K3BH ~ 9HB(F)K9BH	1.45
9HB(F)K12.5BH ~ 9HB(F)K18BH	1.5
9HB(F)K20BH ~ 9HB(F)K60BH	1.7
9HB(F)K75BH ~ 9HB(F)K200BH	1.8
9WD□BL/BR/BRL	1.0
9WHD□-030	1.13
9XD10□□	0.5

● KEY SPEC



Motor Images

9RDD□-60F	9RDD□-60F-T	9RDG□-60FP+9PBK□BH	9RDG□-60FP+9PFK□BH
9RDG□-60FH+9HBK□BH	9RDG□-60FH+9HFK□BH	9RDG□-60FW+9WD□BL	9RDG□-60FWH+9WHD□

B AC Motors

Reversible Motor 60W(□90mm)

Connection Diagrams

Lead Wire Type	Terminal Box Type						
	<table border="1"> <thead> <tr> <th style="background-color: #0070C0; color: white;">Code</th> <th style="background-color: #0070C0; color: white;">Contact Capacity</th> </tr> </thead> <tbody> <tr> <td style="background-color: #D9E1F2;">SW</td> <td>AC125V 5A min. or AC250V 5A min. (Inductive load)</td> </tr> <tr> <td style="background-color: #D9E1F2;">Ro, Co</td> <td>Ro=5-200Ω Co=0.1-0.2μF, 200WV (400WV)</td> </tr> </tbody> </table> <p>* Connect a CR circuit for surge suppression to protect the contact.</p>	Code	Contact Capacity	SW	AC125V 5A min. or AC250V 5A min. (Inductive load)	Ro, Co	Ro=5-200Ω Co=0.1-0.2μF, 200WV (400WV)
Code	Contact Capacity						
SW	AC125V 5A min. or AC250V 5A min. (Inductive load)						
Ro, Co	Ro=5-200Ω Co=0.1-0.2μF, 200WV (400WV)						

- 1) The direction of motor rotation is as viewed from the shaft end of the motor.
- 2) CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- 3) During operation it is available to change the rotating direction by turning the switch to CW or CCW.